




# ACCESS DOORS AND DUCT DRAINS

EN

**TEINNOVA**  
passion for innovation®



# contents



01

ACCESS DOORS FOR INSPECTION  
AND CLEANING FOR AIR DUCTS



02

ACCESS DOORS FOR INSPECTION  
AND CLEANING OF EXTRACTION SYSTEMS





## Description

Access doors for the inspection and cleaning of the interior of air conditioning and ventilation ducts, easily and quickly operated without the need for any tools, they achieve a perfect seal thanks to their double body and airtight gasket, they allow you to comply with current standards.


## Regulations

1. Duct networks must be equipped with access doors in accordance with standard UNE-ENV 12097 to allow for cleaning and disinfection.
2. Elements installed in a duct network must be removable and have an access door or a removable conduit section to allow for maintenance operations. They must be placed at least every 10 m.
3. False ceilings must have inspection hatches that match the position of the doors in the ducts and the devices located in them.

## Technical info

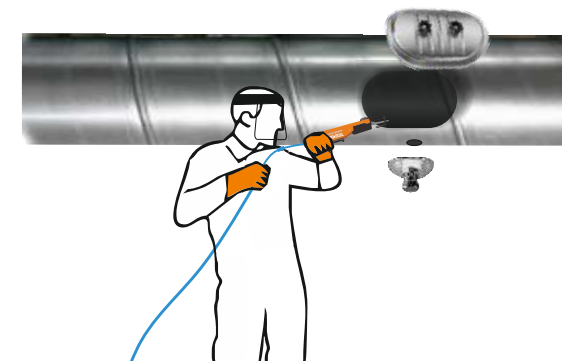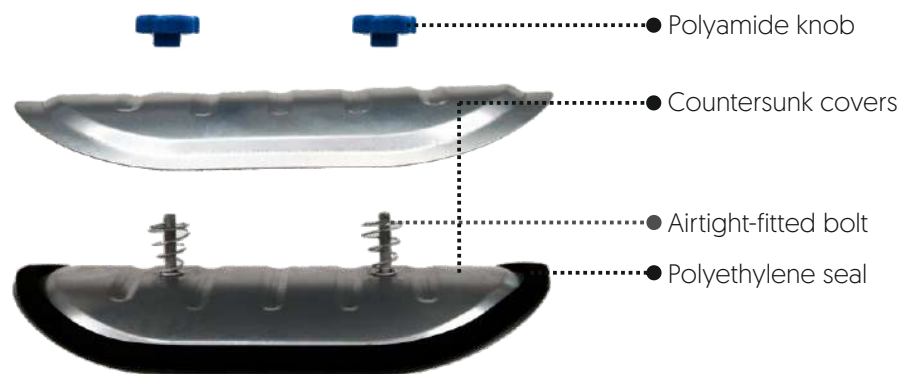

- Structure material:** Galvanized sheet steel or stainless steel.
- Knob material:** Polyamide plastic.
- Seal material:** Polyethylene.
- Available sizes:** 150x250; 300x200; 400x300.
- Range of curvatures:** From 100 to 800 mm in diameter.



# 01

## ACCESS DOORS FOR INSPECTION AND CLEANING FOR AIR DUCTS

AIR DUCTS



# 01

Access doors for ducts




| TYPE OF DUCT   | Size A x B mm and weight | Diameter Ød in mm | Product code |
|--|--------------------------|-------------------|--------------|
| <b>DOORS FOR FLAT DUCTS</b><br> | 200 x 100 mm / 0,5 kg    | ---               | AC6102010    |
|  | 250 x 150 mm / 0,5 kg    | ---               | AC6102515    |
|  | 300 x 200 mm / 0,5 kg    | ---               | AC6103020    |
|  | 400 x 300 mm / 1 kg      | ---               | AC6104030    |


### DESCRIPTION

Access doors for the inspection and cleaning of the interior of air conditioning and ventilation ducts, easily and quickly operated without the need for any tools, they achieve a perfect seal thanks to their double body and airtight gasket, they allow you to comply with current standards.

| TYPE OF DUCT   | Size A x B mm and weight | Diameter Ød in mm | Product code |
|--|--------------------------|-------------------|--------------|
| <b>DOORS FOR CURVED DUCTS</b><br> | 250 x 150 mm / 1 kg      | Ø200 - Ø250       | AC6112525    |
|  | 300 x 200 mm / 1,3 kg    | Ø315 - Ø355       | AC6113035    |
|  | 300 x 200 mm / 1,3 kg    | Ø400 - Ø450       | AC6113045    |
|  | 400 x 300 mm / 1,8 kg    | Ø500 - Ø560       | AC6114056    |
|  | 400 x 300 mm / 1,8 kg    | Ø630              | AC6114063    |




1. Apply the self-adhesive template to the duct wall [included with the product]. The prices shown do not include VAT or transport



2. Cut around the edge of the template to create the opening [see cutting tool on page 6]



3. Unscrew the knobs to their limit, insert the door slightly angled and tighten the knobs to their limit.





# 12 ACCESS DOORS FOR INSPECTION AND CLEANING

OF EXTRACTION SYSTEMS



02

Access doors for ducts




## DESCRIPTION


Access doors for the inspection and cleaning of the interior of fume extraction ducts, can be used simply and quickly, with no tools, they provide a perfect seal thanks to their double body and their fire resistant ceramic fibre seal, with metallic knobs they can comply with current regulations.

| TYPE OF DUCT                    | Size A x B mm and weight | Diameter Ød in mm | Product code |
|---------------------------------|--------------------------|-------------------|--------------|
| <b>DOORS FOR FLAT DUCTS</b><br> | 250 x 150 mm / 0,5 kg    | ---               | AC6122515    |
|                                 | 300 x 200 mm / 0,5 kg    | ---               | AC6123020    |
|                                 | 400 x 300 mm / 2,2 kg    | ---               | AC6124030    |

| TYPE OF DUCT                      | Size A x B mm and weight | Diameter Ød in mm | Product code |
|-----------------------------------|--------------------------|-------------------|--------------|
| <b>DOORS FOR CURVED DUCTS</b><br> | 250 x 150 mm / 1 kg      | Ø200 - Ø250       | AC6132525    |
|                                   | 300 x 200 mm / 1 kg      | Ø400 - Ø450       | AC6133045    |
|                                   | 300 x 200 mm / 1,3 kg    | Ø500              | AC6133050    |



1. Apply the self-adhesive template to the duct wall [included with the product]. The prices shown do not include VAT or transport



2. Cut around the edge of the template to create the opening [see cutting tool on next page]



3. Unscrew the knobs to their limit, insert the door slightly angled and tighten the knobs to their limit.

**TEiNOVA**  
passion for innovation®

