
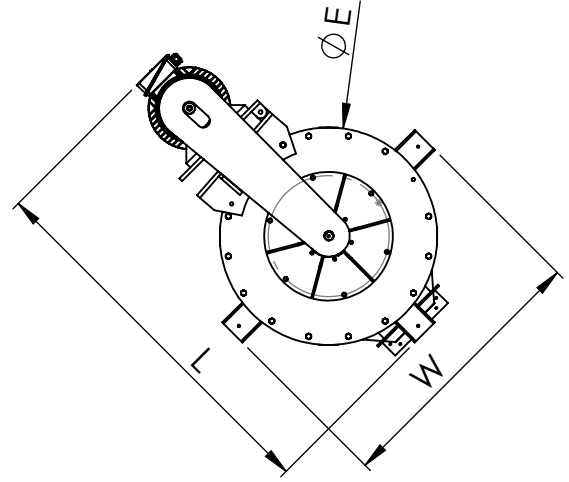


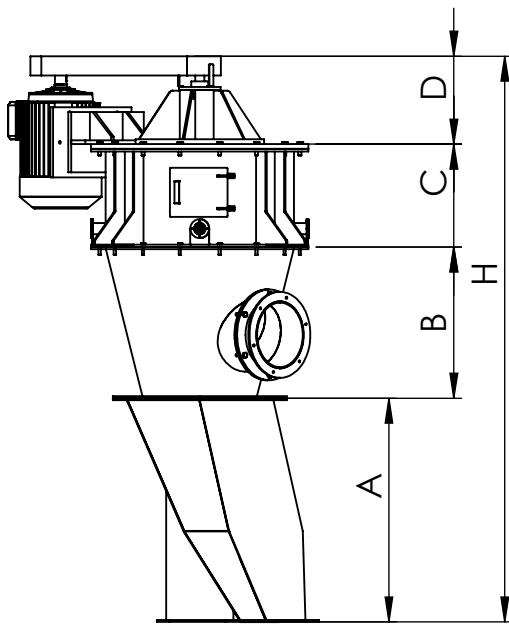

MODEL	KDS 300	KDS 400	KDS 600	KDS 800	KDS 1000	KDS 1200
A	592.5	790	1185	1580	1975	2370
B	400	535	800	1070	1335	1600
C	272.5	360	545	720	910	1090
D	230	305	460	610	765	920
E	575	766	1150	1532	1917	2300
H	1495	1990	2990	3980	4985	5980
L	1000	1335	2000	2670	3335	4000
W	720	960	1440	1920	2400	2880

MAKSİMUM VERİM TABLOSU (Kg/h)

d97 < 8µm	d50 < 1µm	600	800	1200	1600	2000	2400
d97 < 10µm	d50 < 2µm	800	1050	1600	2100	2650	3200
d97 < 15µm	d50 < 3µm	900	1200	1800	2400	3000	3600
d97 < 20µm	d50 < 5µm	1100	1450	2200	2900	3650	4400
d97 < 40µm	d50 < 10µm	1600	2150	3200	4300	5350	6400

TEKNİK ÖZELLİKLER

MAX. HAVA ÇIKIŞI	m ³ /h	5000	6650	10000	13300	16650	20000
MAX. BESLEME ORANI	kg/h	5000	6650	10000	13300	16650	20000
MAX. ROTOR HIZI	min ⁻¹	3250	2500	2500	1550	1550	1550
MOTOR GÜCÜ	kw	22	30	37	55	75	55
YAKLAŞIK HAVA DEBİSİ	m ³ /h	7500	10000	15000	20000	25000	30000
YKLŞK HAVA BASINCI	daPa	1250	1250	1250	1250	1250	1250
FAN MOTOR GÜCÜ	kw	37	55	75	110	132	160
ÖNRLN FİLTRE KAPASİTESİ	m ²	120	160	240	320	400	480