

NOVA

Sliding Compound Miter Saw Ø 250 mm



Features

Used for cutting processes of aluminum, plastic and wooden materials.





- Cutting at any desired angle between -45° and +45°
- 0°, 5°, 10°, 15°, 20°, 22,5°, 25°, 30°35°, 40°, 45° right and left angle fixing
- Head with ability to tilt left between 0° and 45° (Performs tilt cutting when lower plate is at 0 (Zero) position)
- Laser Guide for accurate cuts
- Screw workpiece clamp
- Length stop kit for wide material support
- Dust bag equipped with a zipper
- Anti vibration feet

Standard Equipment

- Dust bag
- Screw workpiece clamp
- Laser Guide

Optional Equipment

- Stand
- Ø 250 mm saw blade

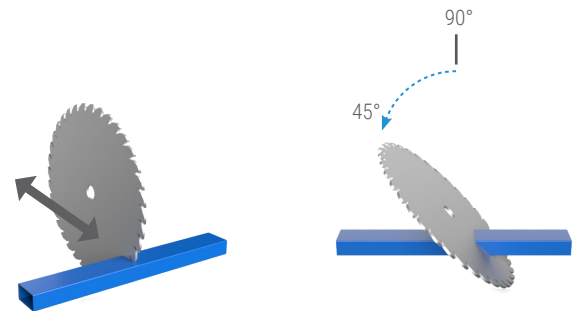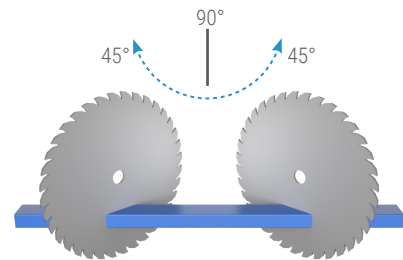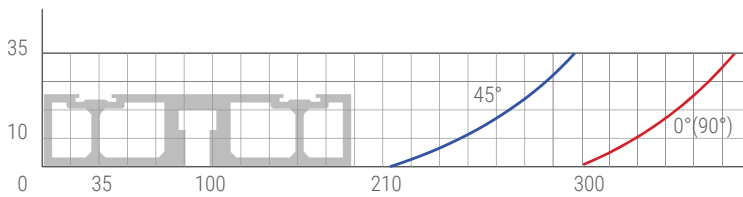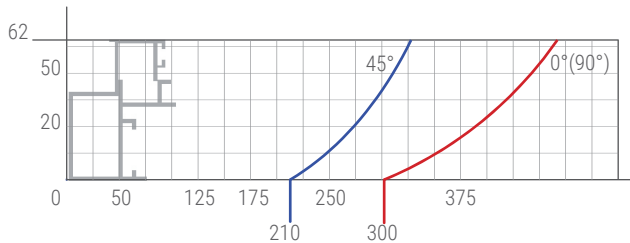

HP kW	n r.p.m	1~ Hz	I (230 V) A	∅ D mm	∅ d mm	s mm	n r.p.m	45° a x b mm	I x w x h (mm) kg
1,6 1,2	3000	50 60	4,5	250	25,5	2	3000	300 x 35	740 x 540 x 440 21,5 kg