

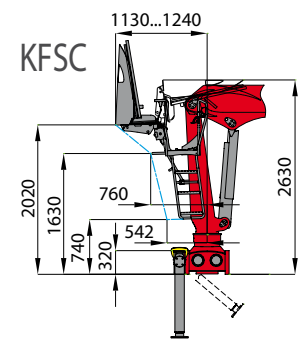
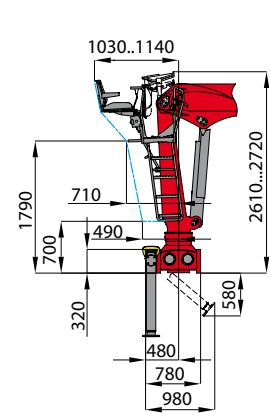
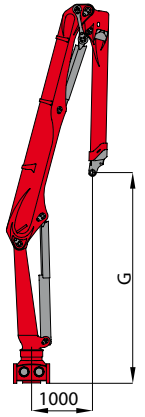
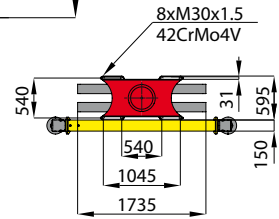












**Q5200L/S260L
S290L HPLS/S270L
S300L HPLS**

LIFETIME EXCELLENCE

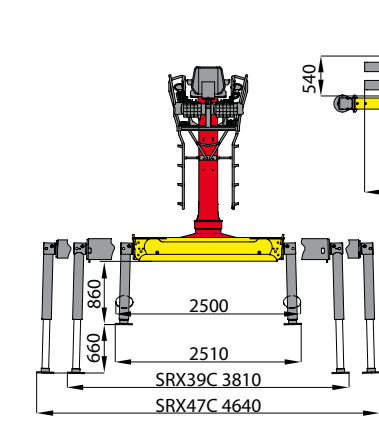

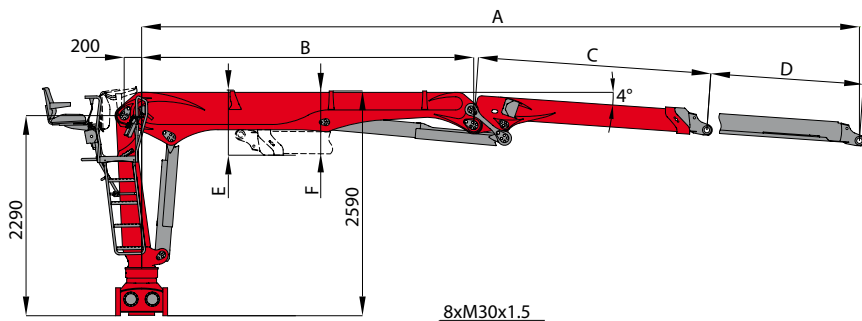

	82	87	97	102	107	109	128	130	83	88	98	103
A	8210	8710	9670	10170	10690	10870	12800	13030	8350	8850	9800	10300
B	3800	4300	3800	4300	4900	5000	6800	6800	3930	4430	3930	4430
C	2670	2670	2720	2720	2630	2720	6000	4490	2660	2660	2720	2720
D	1750	1750	3160	3160	3160	3160	-	1750	1750	1750	3160	3160
E	750	760	820	820	-	820	700	770	760	760	820	820
F	740	740	790	790	-	790	690	740	740	740	790	790
G	3460	3940	3410	3900	4570	4580	3070	4580	3480	3970	3430	3920

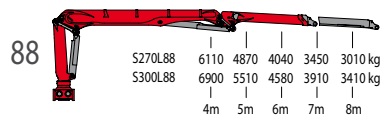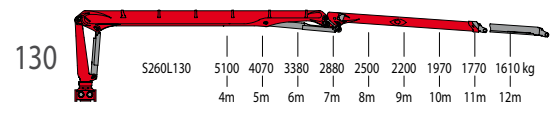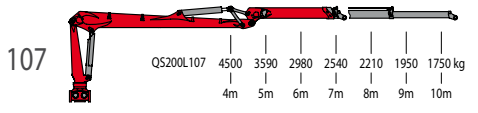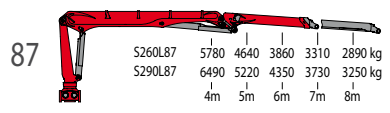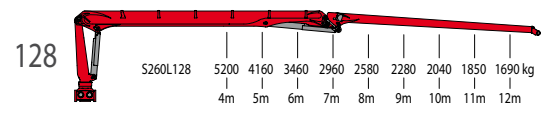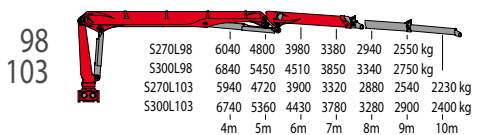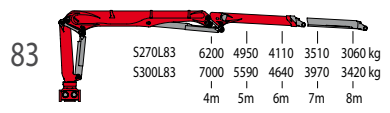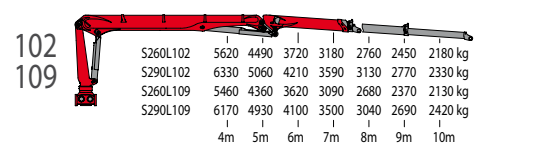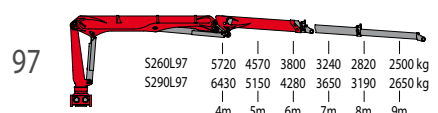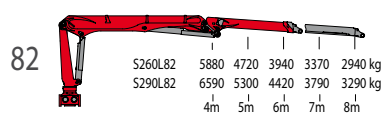

		QS200L	S260L							S290L _{HPLS}					S270L				S300L _{HPLS}			
		107	82	87	97	102	109	128	130	82	87	97	102	109	83	88	98	103	83	88	98	103
ONROAD RECYCLING																						
	[kNm]	180	236	232	229	225	218	208	204	265	261	258	253	246	248	244	242	238	280	276	274	270
	[kNm]	34	39																			
	[°]	385																				
	[m]	10,7	8,2	8,7	9,7	10,2	10,9	12,8	13,0	8,2	8,7	9,7	10,2	10,9	8,3	8,8	9,8	10,3	8,3	8,8	9,8	10,3
	[bar]	270	280							280 (310 HPLS)					260				260 (290 HPLS)			
	2K [l/min]	2 x 80	2 x 90																			
	[kg]	2370	2360	2410	2520	2570	2640	2660	2750	2370	2420	2530	2580	2650	2500	2540	2660	2710	2510	2550	2670	2720
	SRX39C [kN]	157	187							199					189				206			
	SRX47C [kN]	127	151							161					153				167			