

UNIVERSAL T-SLOT HYDRAULIC PRESSES

SHAT



SHAT GENERAL FEATURES

- ▶ Top and bottom table with T-slot
- ▶ Steel construction welded frame
- ▶ Two guide pistons on both sides
- ▶ Adjustable bottom table
- ▶ Table up-down movement attachment
- ▶ Adjustable pressure valve
- ▶ Manometer
- ▶ Stepless stroke adjustment
- ▶ Two hand control


SHAT OPTIONAL EQUIPMENT

- ▶ Two hand control and foot pedal
- ▶ Press brake tooling
- ▶ Custom T-slot tables

HYDRAULIC PRESSES

FOR LIVES
Shaped By
METAL

UNIVERSAL T-SLOT HYDRAULIC PRESSES

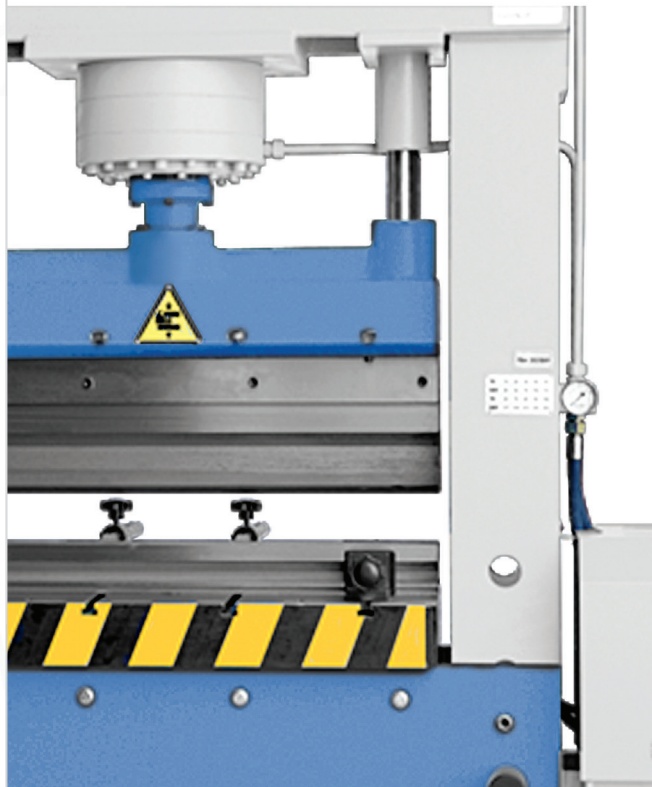

SHAT MODELS

MODEL	CAPACITY	MAX. WORKING PRESSURE	STROKE	WIDTH OF WORKING AREA	DISTANCE BETWEEN TABLES	ADVANCE SPEED	WORKING SPEED	RETURN SPEED	TABLE DIMENSION	BOTTOM TABLE HOLE DIAMETER	MOTOR POWER	WIDTH	LENGTH	HEIGHT	WEIGHT
	ton	bar	mm	mm	mm	mm/sec	mm/sec	mm/sec	mm	mm	kW	mm	mm	mm	kg
SHAT 1020-100	100	263	300	1020	680	8.0	5.0	10.0	500x1020	100	7.5	1000	2110	2275	1900
SHAT 1520-100	100	263	300	1520	680	8.0	5.0	10.0	500x1520	100	7.5	1000	2630	2275	2500
SHAT 1020-150	150	244	300	1020	610	9.0	5.0	10.0	600x1020	100	11.0	1000	2110	2450	2400
SHAT 1520-150	150	244	300	1520	610	9.0	5.0	10.0	600x1520	100	11.0	1000	2630	2450	3100