

FINE-JET


AIR-CONTROLLED AIRLESS Spray Package

AIR-CONTROLLED AIRLESS ORDERING INFORMATION				
MODEL	FOUR-LEG STAND	HOSE	GUN FG210	PART No
FINE-JET 30-08	●			F30NIP0
	●	●	●	F30NIP1

CHOOSE THE BEST ACCESSORIES FOR YOUR PROJECT			
LINE FILTER	GRAVITY TANK	AIR-CONTROLLED AIRLESS SPRAY GUN	
Reduce spray gun clogging with 60 mesh fluid outlet filter in stainless steel. Isolation shut-off valves and fittings included. 100 and 200 mesh size available upon request. 	For use with small volume applications. Connects directly to the pump inlet. Volume: 4 l (1 gal) Inlet mesh size: 60 mesh 	FG210 SPRAY GUN Max. working pressure: 210 bar (3,045 psi) Fittings: 1/4" BSP 	DOUBLE HOSE Length: 7,5 m Diameter: 3/16" Swivel fitting: 1/4" NPSM Different dimensions and lengths available 



**SUPERIOR FINISH AND RAPID
COLOR CHANGE**

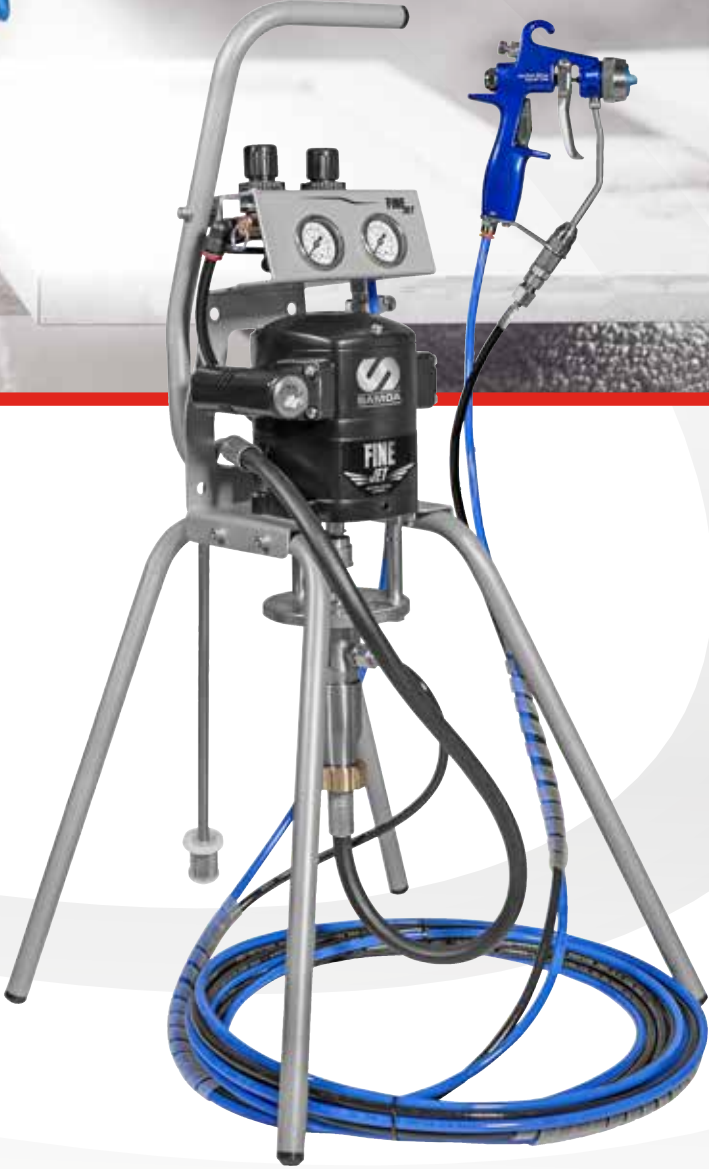

SAMOA INDUSTRIAL, S.A. - HEADQUARTERS
SPAIN AND EXPORT MARKETS
POL. IND. PORCEYO, I-14 - CAMINO DEL FONTÁN, 831
E-33392 GIJÓN (ASTURIAS), SPAIN
TEL.: +34 985 381 488 - FAX: + 34 985 147 213

SAMOA LTD.
UNITED KINGDOM AND REP. OF IRELAND
ASTURIAS HOUSE - BARRS FOLD ROAD
WINGATES INDUSTRIAL PARK
WESTHOUGHTON, BL5 3XP, UK
TEL.: +44 1942 850600 - FAX: +44 1942 812160

SAMOA S.A.R.L.
FRANCE
P.A.E.I. DU GIESSEN
3, RUE DE BRISCHBACH
67750 SCHERWILLER, FRANCE
TEL.: +33 3 88 82 79 62 - FAX: +33 3 88 82 77 88

SAMOA FLOWTECH GMBH
GERMANY, AUSTRIA, SWITZERLAND, THE NETHERLANDS AND GREECE
AM OBEREICHHOLZ 4
D - 97828 MARKTHEIDENFELD, GERMANY
TEL.: +49 9391 9826 0 - FAX: +49 9391 98 26 50



CONTACT US TODAY!
Visit www.samoaindustrial.com for more information.

SAMOA CORPORATION
USA, CANADA AND MEXICO
90 MONTICELLO ROAD
WEAVERVILLE, NC 28787, USA
TEL. +1 (828) 645-2290 - FAX: +1 (828) 658 0840

SAMOA CHINA SALES OFFICE
ROOM 8223, BUILDING 2, LANE 1220, ZHOULIAZUI ROAD
SHANGHAI 200082, P.R. CHINA
TEL. & FAX: +86 21 5515 0064

©Copyright, SAMOA INDUSTRIAL, S.A.

SAMOA Industrial, S.A. is an ISO 9001, ISO 14001
and ISO 45001 certified company.



Achieve the best quality finish for your surfaces using the air-controlled airless 30:1 spray package by SAMOA

Our spray package has been meticulously designed to obtain a fine finish on **metal and wooden surfaces** with frequent colour changes. Engineered with precision and innovation, this package offers a cutting-edge solution combining airless spraying **productivity** and low air pressure **superior quality finishing**. With SAMOA's air-controlled airless 30:1 spray package say goodbye to imperfect finishes and achieve the desired finishing results.

- **High transfer efficiency and quality finish**
 - **Low pulsations** air motor
 - **Universal connection** standards, compatible with major brands
- **Quick lower pump disassembles** for easier servicing
 - Ready to use with **catalyzed paints and varnishes**
 - Built to last, low cost of ownership and **long life cycle**

Smooth and reliable operation


Efficient and quiet-operating air motor, with a smooth and rapid changeover for an even finish.
Non-icing air motor to avoid stoppages.

Get the most out of your sprayed product

Surface thermal treated lower pump for improved abrasion and corrosion resistance. Designed with a short stroke to minimize product waste and simplify maintenance. Motor and lower pump connection with fewer parts for quick coupling and disassembling.

Effortless cleaning and maintenance

Coarse threaded suction valve for quick disassembly. Effortless cleaning with minimal solvent usage for fast colour change.

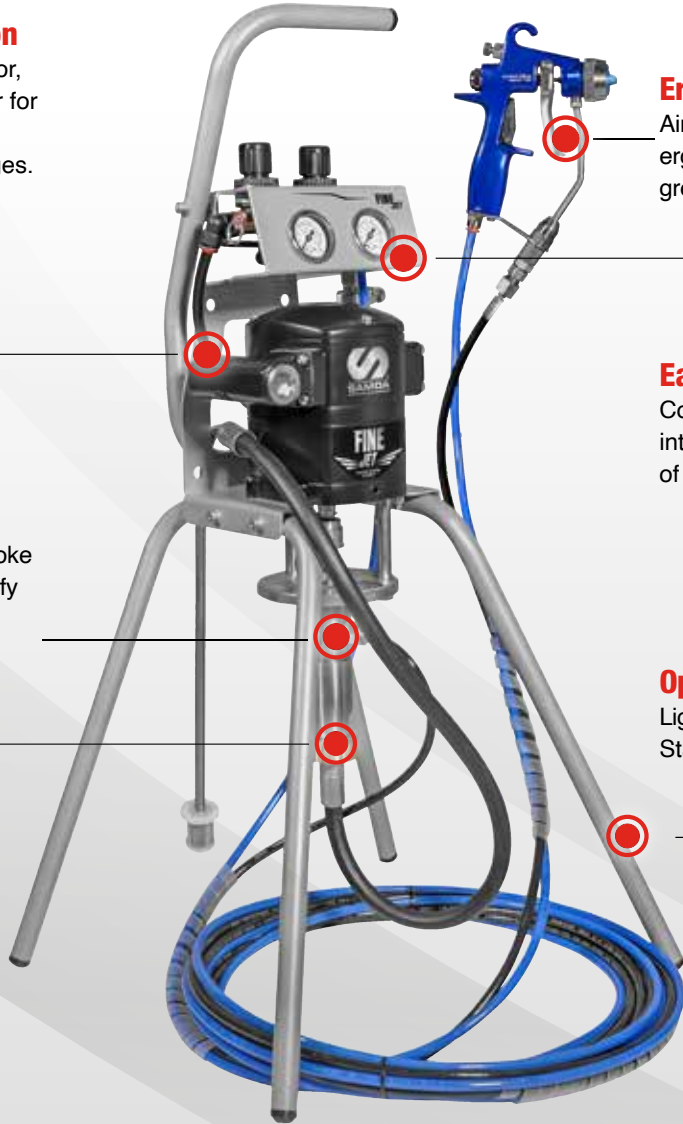

Ergonomic spraying gun

Air-controlled airless gun with ergonomic lightweight design for greater comfort and better grip.

Easy control

Control panel for an easy and intuitive air management supply of the pump and the spray gun.

Operator's comfort in mind

Lightweight and easy to transport. Stable four-leg stand.

MATERIALS

Varnishes
Lacquers
Water / solvent based products

APPLICATIONS

Woodworking and furniture
Metal products and machinery

FINE-JET AIR-CONTROLLED AIRLESS Spray Package

TECHNICAL DATA	FINE-JET 30-08
Ratio	30:1
Displacement per cycle	8 cc
Max. spray tip orifice size	0.021"
Max. air pressure	7 bar (100 psi)
Max. fluid pressure	210 bar (3.045 psi)
Air inlet thread	Quick coupler 1/4" (M)
Fluid outlet thread	1/4" NPT (F)
Air motor effective diameter	80 mm (3.15")
Pump stroke	28 mm (1.1")
Seal material	PTFE / UHMWPE
Pump weight	5,6 kg (12.35 lb)

HOSE & GUN KIT: THE PERFECT KIT TO IMPROVE YOUR PERFORMANCE

- PRODUCT HOSE: ø 1/8" x 7,5 m (24.6 feet) - fitting 1/4" NPSM
- AIR HOSE: ø 6x8 mm x 7,5 m, quick air coupler
- FG210 SPRAY GUN: 210 bar (3,045 psi) - fitting 1/4" BSP
- INCLUDES TWO TIPS: 411, 409



AIR-CONTROLLED AIRLESS SPRAY GUN

- Ergonomic and lightweight design
- Optimized valve and trigger design to avoid operator's fatigue
- Swivel inlet thread, fitting 1/4" BSP
- Easy servicing
- Universal standard filter and spray tips