



Technical Data
Specification & Capacities

SL-JC-COLUMN




EN 13000


09.11.2024| rev.01

[m] [kg]

SL-JC-COLUMN

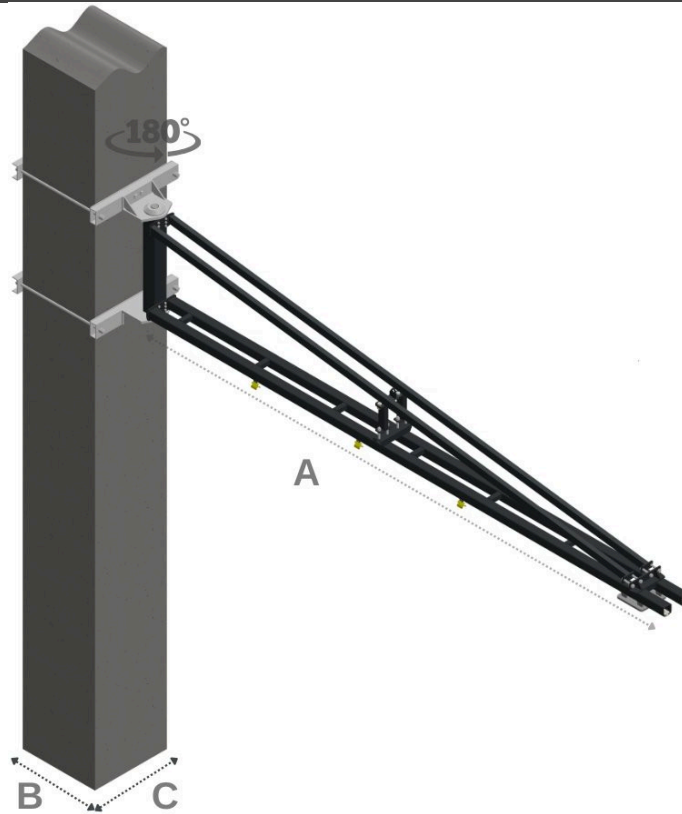

The SL-JC-COLUMN model mounted on the column is offered with 500 kg and 1000 kg carrying capacity options. Parameters A, B and C can be determined flexibly to best suit your needs and projects. The SL-JC-COLUMN model can be securely fixed to the column with the clamps located behind the joints. It is designed to offer a wide working area with the capacity of the compass to rotate up to 180 degrees.

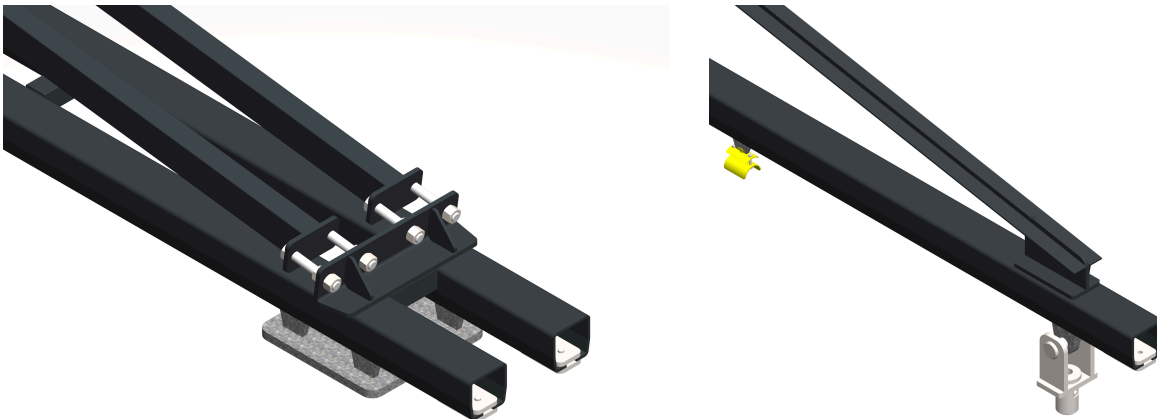

Thanks to the trolley mechanism integrated into the jib arm, air can be easily delivered to any point where you need pneumatic systems. This design helps you save time and energy by increasing operational efficiency. Depending on the attachment you will use, you can choose a single-way or double-way configuration in the SL-JC-COLUMN model.



SAİT KOÇAK MAKİNA SAN. VE TİC. LTD. ŞTİ.

Akçeşme Mh. 2634 Sk. No:18
Merkezefendi/DENİZLİ 20070 TURKEY

www.singlelift.com info@singlelift.com +90 258 999 25 56