



GENERAL PRODUCT CATALOGUE



High Pressure Washers
Cleaning Equipment



We manufacture Quality to the World



Köseler Mh. 29. Sk. No: 1/1
Kobi OSB Dilovası / KOCAELİ
Tel.: +90 262 728 10 80 - 99
info@paxmakina.com
www.paxmakina.com

PAX
MAKİNA ENDÜSTRİYEL ÜRÜNLER SAN. TİC. LTD. ŞTİ.



COLD WATER HIGH PRESSURE WASHERS



Pax High Pressure Washing Machines are machines designed to achieve maximum performance with low water consumption and ease of use, using Italian pump technology.

Our machines, which are produced in different models and pressures as cold and hot water according to the usage area, are suitable for use not only in car washes and car detailing, but also in many different areas such as industrial areas, highways, airlines, shipping, restaurants, hospitals, livestock farms and agriculture.



Technical Information:

Product Code	Pump Pressure (Bar)	Operating Pressure (Bar)	Flow (Lt/min.)	Motor Power (Kw-Hp)	Voltage / Phase / (Volt)	Pump Type	Hose Length
C-150	150 / AR Pump	30-150 Adjustable	15 Adjustable	4 / 5,5	220 / 1	3 Cylinder Ceramic Piston	R2 / 12m
C-200	200 / AR Pump	30-200 Adjustable	15 Adjustable	5,5 / 7,5	380 / 3	3 Cylinder Ceramic Piston	R2 / 12m
C-250	250 / AR Pump	30-250 Adjustable	15 Adjustable	7,5 / 10	380 / 3	3 Cylinder Ceramic Piston	R2 / 12m
C-300	300 / AR Pump	30-300 Adjustable	21 Adjustable	11 / 15	380 / 3	3 Cylinder Ceramic Piston	R2 / 12m



COLD WATER HIGH PRESSURE WASHERS



Pax High Pressure Washing Machines are machines designed to achieve maximum performance with low water consumption and ease of use, using Italian pump technology.

Our machines, which are produced in different models and pressures as cold and hot water according to the usage area, are suitable for use not only in car washes and car detailing, but also in many different areas such as industrial areas, highways, airlines, shipping, restaurants, hospitals, livestock farms and agriculture.



Technical Information:

Product Code	Pump Pressure (Bar)	Operating Pressure (Bar)	Flow (Lt/min.)	Motor Power (Kw-Hp)	Voltage / Phase / (Volt)	Pump Type	Hose Length
E-150	150 / AR Pump	30-150 Adjustable	15 Adjustable	4 / 5,5	220 / 1	3 Cylinder Ceramic Piston	R2 / 12m
E-200	200 / AR Pump	30-200 Adjustable	15 Adjustable	5,5 / 7,5	380 / 3	3 Cylinder Ceramic Piston	R2 / 12m
E-250	250 / AR Pump	30-250 Adjustable	15 Adjustable	7,5 / 10	380 / 3	3 Cylinder Ceramic Piston	R2 / 12m
E-300	300 / AR Pump	30-300 Adjustable	21 Adjustable	11 / 15	380 / 3	3 Cylinder Ceramic Piston	R2 / 12m



HOT - COLD WATER HIGH PRESSURE WASHERS



Pax High Pressure Washing Machines are machines designed to achieve maximum performance with low water consumption and ease of use, using Italian pump technology.

Our machines, which are produced in different models and pressures as cold and hot water according to the usage area, are suitable for use not only in car washes and car detailing, but also in many different areas such as industrial areas, highways, airlines, shipping, restaurants, hospitals, livestock farms and agriculture.



Technical Information:

Product Code	Pump Pressure (Bar)	Operating Pressure (Bar)	Flow (Lt/min.)	Hot Water Temperature (Max)	Motor Power (Kw-Hp)	Voltage / Phase / (Volt)	Pump Type	Fuel Type	Fuel Consumption (Lt/h)	Hose Length
H-150	150 / AR Pump	30-150 Adjustable	15 Adjustable	120 Adjustable	4 / 5,5	220 / 1	3 Cylinder Ceramic Piston	Motorin	3 - 6	R2 / 12m
H-200	200 / AR Pump	30-200 Adjustable	15 Adjustable	120 Adjustable	5,5 / 7,5	380 / 3	3 Cylinder Ceramic Piston	Motorin	3 - 6	R2 / 12m
H-250	250 / AR Pump	30-250 Adjustable	15 Adjustable	120 Adjustable	7,5 / 10	380 / 3	3 Cylinder Ceramic Piston	Motorin	3 - 6	R2 / 12m
H-300	300 / AR Pump	30-300 Adjustable	21 Adjustable	120 Adjustable	11 / 15	380 / 3	3 Cylinder Ceramic Piston	Motorin	3 - 6	R2 / 12m



PRESSURED STEAM WASHER



Using Italian pump technology, **Pax Pressure Steam Washer** is manufactured in order to clean easily and quickly the places where it is difficult to reach and where water cannot be used.

It produces 200 °C hot steam, making it very easy to reach and clean successfully in places that are difficult to clean. It will allow you to achieve effective results in a short time. It is extremely useful in places where there are electrical and electronic parts are placed in a vehicle.



Technical Information:

Product Code	Max. Steam Pressure	Max. Steam Temperature	Water - Steam Capacity	Voltage	Gun Type	Initial Heating Duration	Water Filling Type	Motor - Pump Gun	Safety Equipment
B-200	8 Bar	160 - 200 °C	35 Lt. - 20 Lt.	380 Volt	2 Pieces 2 Operators	5 - 7 Dk.	Automatic - Manual	Italian	Valve Pressure Stabilizer Pressure Valve



FOAM - LIQUID SPRAYERS



Pax Foam and Liquid Spray Tanks are equipment to be used in cleaning vehicles, machinery etc. by spraying the chemical as foam and liquid, without the need for brushes and sponges.

Foam spray tanks, which can operate with maximum 5 bar air, bring professional ease of use with their superior performance.



Technical Information:

Product Code	Pressure (Bar)	Capacity	Function	Weight	Dimensions	Hose Length	Hose Thickness
K-65	5 Bar	65 Lt.	Foam - Liquid	20 Kg.	50 x 50 x 95 cm	8 mt.	8 mm.
K-100	5 Bar	100 Lt.	Foam - Liquid	26 Kg.	50 x 50 x 110 cm	8 mt.	8 mm.



HOT AIR GENERATOR



Pax Hot Air Generator, is produced to be able to quickly dry places such as carpets, seats, curtains, floors etc. indoors and in vehicles.

With its robust body, the electric hot air generator dries very quickly by blowing hot air from 4 arms by adjusting the temperature level at the desired level thanks to the heat thermostat.



Technical Information:

Product Code	Motor Power	Heating Power	Heat Temperature	Voltage	Cable Length	Dimensions	Weight
SH-220	0,37 kW	1500 W x 4	0 - 90°	220 V	10 Mt.	42x42x62 cm	22 Kg.
SH-380	0,37 kW	1500 W x 4	0 - 90°	380 V Trifaz	10 Mt.	42x42x62 cm	22 Kg.



INDUSTRIAL TYPE WET - DRY VACUUM CLEANERS



Pax Wet - Dry Industrial Type Vacuum Cleaners are produced for use in such a way that they can easily absorb solid and watery dirt that occurs on both wet and dry floors, with its specially designed stainless-steel body.

These highly professional vacuum cleaners are produced in different capacities as 1 motor - 2 motors and 3 motors. Only one motor power is 1200 Watts. It provides effective cleaning on all kinds of surfaces like carpet - armchair - curtain - rubber - marble - parquet - ceramic - glass etc.



Technical Information:

Product Code	Function	Voltage (V) Frequency (Hz)	Motor Power	Vacuum Power (m-Bar)	Air Flow	Tank Capacity	Noise Level	Cable Length
PX 602-S	Wet - Dry	220 / 240V 50 - 60 Hz	1400 W x 2	245mbar / 24,5 kPa x 2	60 Lt./h x 2	60 Lt.	68 dB	2 x 1,5mm ² 10 mt.
PX 603-S	Wet - Dry	220 / 240V 50 - 60 Hz	1400 W x 3	245mbar / 24,5 kPa x 3	60 Lt./h x 3	60 Lt.	85 dB	2 x 1,5mm ² 10 mt.



CAR SEAT AND CARPET CLEANING MACHINE



Pax Car Seat and Carpet Cleaning Machine, with its specially designed stainless-steel body, is suitable for use on both wet and dry floors. It has a 2800-Watt vacuum power that can clean places like sofa, carpet, bed etc. professionally and easily without tiring the user.

This highly professional machine is a machine that is constantly used and preferred in many areas such as auto detailed cleaners, hotels, hospitals, cleaning companies.




Technical Information:

Product Code	Power	Vacuum Power (m-Bar)	Air Flow	Motor Power	Function	Voltage	Tank Capacity (Dirty Water)	Tank Capacity (Clean Water)	Dimensions	Cable Length
PX-60	2800 W Double Fan Motor	245mbar 24,5 kPa x 2	61 Lt./Sn.	1400 W x 2	Wet - Dry	220 - 240 V	60 Lt.	15 Lt.	56x70x106 cm	10 mt.



HARD FLOOR AND CARPET CLEANING MACHINES

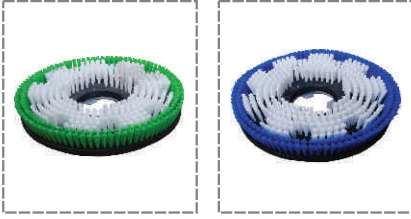

Pax Carpet Washing Machine is a professional machine that can perform many tasks such as carpet washing, floor cleaning and polishing.

Our product, which is especially preferred by carpet cleaning companies, enables fast and effective cleaning of carpets thanks to its special brushes. It is suitable for easy use without tiring with its ergonomically designed handle.



Technical Information:

Product Code	Voltage	Motor Power	Brush Diameter	Brush RPM	Tank Capacity	Cable Length	Weight
PX-521	220 V - 50 Hz	1200 W	38 cm	154 Devir / Dak.	10 Lt.	12 mt.	45 Kg.




Lubrication Equipment





AIR-OPERATED GREASE PUMP

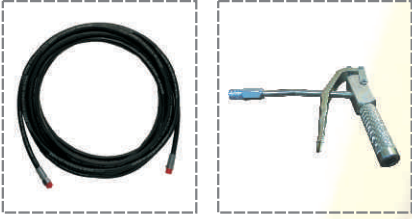

Pax Air Operated Grease Pumps, 30 Kg. and 50 Kg. It has been produced in order to lubricate with high pressure and has the capacity to take grease in different volumes.

With its ergonomic design, it provides the user with easy and professional lubrication in all aspects. It can be easily taken to the desired place with its movable wheels. Steel wire reinforced special hoses are used for durability in operation.




Technical Information:

Product Code	Pressure Ratio	Air Consumption	Operating Pressure	Efficiency	Capacity	Dimensions	Weight
HGP-A1	45/1	80 - 90 Lt. / min.	6 - 8 Atü	0.800 Kg. / min.	30 Kg.	42x42x92 Cm	21 Kg.
					50 Kg.	42x42x117 Cm	24 Kg.
HGP-A2	70/1	80 - 90 Lt. / min.	6 - 8 Atü	0.800 Kg. / min.	30 Kg.	42x42x92 Cm	21 Kg.
					50 Kg.	42x42x117 Cm	24 Kg.




AIR-OPERATED WASTE-OIL EXTRACTOR

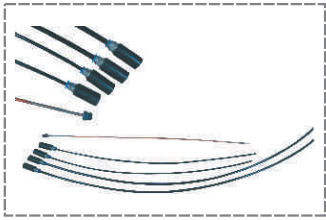

Pax Waste-Oil Extractor, is manufactured in order to easily collect the oil, which is desired to be changed in hard-to-reach places with its 80 + 9 Lt. usage capacity, with the help of air.

With its ergonomic design, it provides easy and professional use to its users in every way. It can be easily taken to the desired place thanks to its wheels. There are different sizes of oil suction hoses on it.

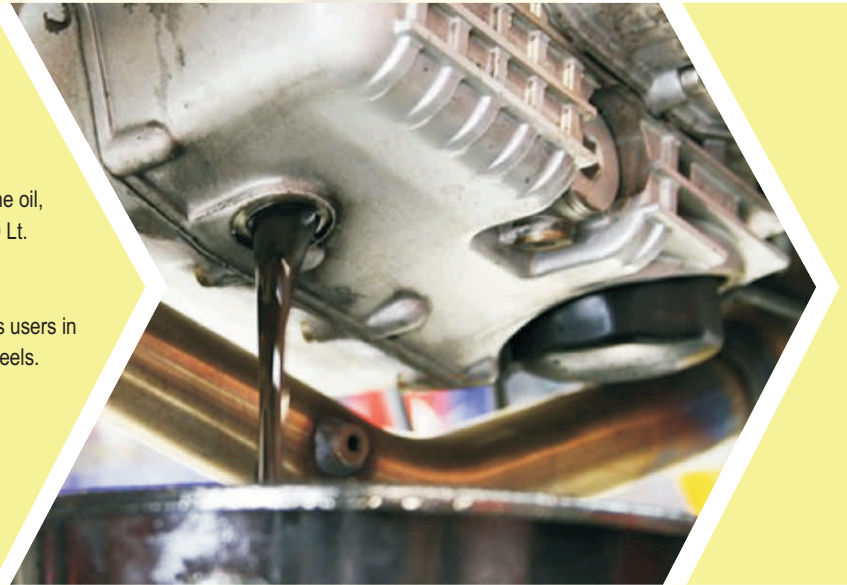


Technical Information:

Product Code	Air Consumption	Operating Pressure	Hose Length	Efficiency	Capacity	Dimensions	Weight
KY-01 Fanuslu	80 - 90 Lt. / min.	6 - 8 Atü	2 Mt.	3 Lt. / min.	60 Lt.	42x42x117 Cm	24 Kg.
					90 Lt.	50x55x120 Cm	28 Kg.
KY-02 Hunili - Fanuslu	80 - 90 Lt. / min.	6 - 8 Atü	2 Mt.	3 Lt. / min.	90 Lt.	50x55x120 Cm	31 Kg.
KY-03 Tavali - Fanuslu	80 - 90 Lt. / min.	6 - 8 Atü	2 Mt.	3 Lt. / min.	90 Lt.	50x55x120 Cm	31 Kg.



ELECTRIC-OPERATED WASTE-OIL EXTRACTOR

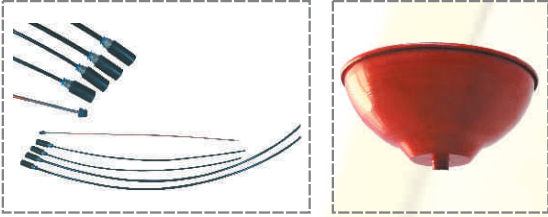

Pax Electric-Operated Waste-Oil Extractor, is produced for places without air compressor with its usage capacity of 80 + 9 Lt. and high-speed vacuum feature.

Thanks to the glass partition, it is easy to monitor how much oil has been drawn. With its ergonomic design, it provides easy and professional use to its users in every way. It can be easily taken to the desired place thanks to its wheels. There are different sizes of oil suction hoses on it.



Technical Information:

Product Code	Operation Type	Operation Temperature	Voltage	Capacity	Hose Length	Dimensions	Weight
KY-04	Elektrikli	60 - 80 °C	220 V	80 + 9 Lt.	2 Mt.	54x72x116 Cm	40 Kg.



AIR OPERATED MOBILE PARTS WASHER



Pax Air-Operated Mobile Parts Washer is produced with ideal features especially for cleaning the parts dismantled from vehicles, machines and small tools.

Its ergonomic design provides easy and professional use to its users in every way. It can be easily taken to the desired place thanks to its wheels. There are brushes and air guns for quick drying.



Technical Information:

Product Code	Tank Metal Thickness	Tank Volume	Operating Pressure	Washbasin Dimensions	Dimensions	Weight
PY-01	3 mm	100 Lt.	4 Atü	46x56x25 mm	50x70x95 Cm	44 Kg.



GRAVITY WASTE OIL DRAINER



Pax Gravity Waste Oil Drainer is an equipment manufactured for collecting waste engine oil from vehicles.

With the telescopic funnel on it, it can easily collect the waste oil into the tank which has the capacity of 65 Lt. and 100 Lt. Waste oil discharge from the tank can be done easily with air and it can be easily taken to the desired place thanks to its wheels.



Technical Information:

Product Code	Maximum Height	Operating Type	Capacity	Dimensions	Weight
YBP-01	160 Cm	Gravity and Air	65 Lt.	42x42x92 Cm	15 Kg.
			100 Lt.	50x50x95 Cm	18 Kg.



MANUAL GREASE PUMP



Pax Manual Grease Pump works by hand manually. Steel reinforced special hydraulic hose is used on the pump.

With its ergonomic design, it provides easy and professional to use in every way. It can be easily taken to the desired place thanks to its wheels.



Technical Information:

Product Code	Operating Pressure	Operating Type	Capacity	Hose Length	Dimensions	Weight
MGP-01	150 Bar	Manual	25 Kg.	1,5 Mt.	33x33x72 Cm.	19 Kg.



MANUAL OIL PUMP



Pax Manual Oil Pump works by hand manually. Used for transmission and differential lubrication. Long-lasting cloth reinforced hose is used.

With its ergonomic design, it provides easy and professional use to its users in every way. It can be easily taken to the desired place thanks to its wheels.



Technical Information:

Product Code	Operating Type	Capacity	Efficiency	Dimensions	Weight
TYP-01	2 spin forward - 2 spin reserve	18 Kg.	250 ml./spin	33x33x72 Cm.	18 Kg.



Air Compressors






100 LT. BELT - DRIVEN AIR COMPRESSORS



Pax Belt-Driven Air Compressors are single and double stage, high quality and high-performance compressors produced for industrial use.

It is driven by V belt - pulley. It can also be manufactured in different forms as single-phase and three-phase. The safety of the belt - pulley system is provided with a closed casing, and Italian ABAC pump head is used in order to supply efficient long lasting quality product life.

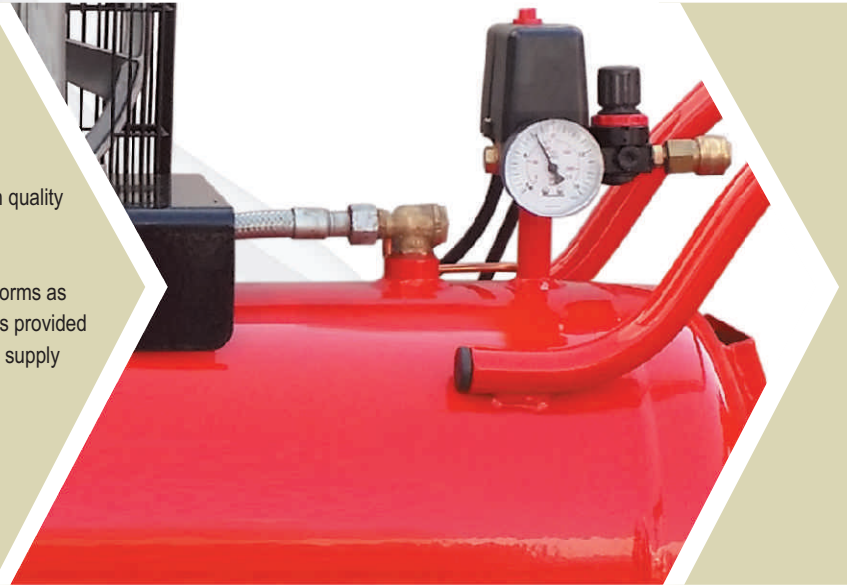

Technical Information:

Product Code	Pressure	Stage	Motor Power	Tank Volume	Air Suction	Dimensions	Weight
PHK-100	9 Bar	1	1,5 / 2 kW-Hp	100 Lt.	323 Lt./min.	37x130x84 Cm	93 Kg.
PHK-100-M	9 Bar	1	1,5 / 2 kW-Hp	100 Lt.	323 Lt./min.	37x130x84 Cm	95 Kg.




200 LT. BELT - DRIVEN AIR COMPRESSORS



Pax Belt-Driven Air Compressors are single and double stage, high quality and high-performance compressors produced for industrial use.

It is driven by V belt - pulley. It can also be manufactured in different forms as single-phase and three-phase. The safety of the belt - pulley system is provided with a closed casing, and Italian ABAC pump head is used in order to supply efficient long lasting quality product life.

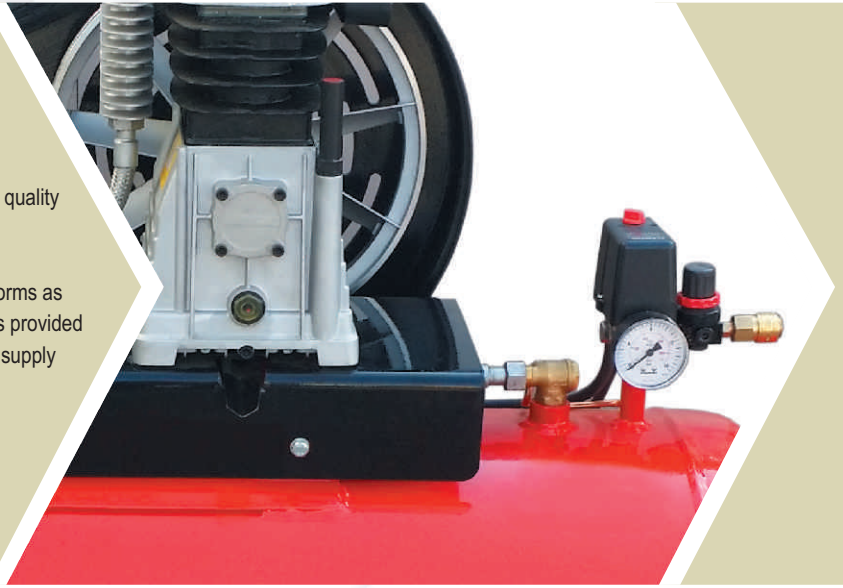

Technical Information:

Product Code	Pressure	Stage	Motor Power	Tank Volume	Air Suction	Dimensions	Weight
PHK-200	9 Bar	1	2,2 / 3 kW-Hp	200 Lt.	420 Lt./min.	48x130x102 Cm	126 Kg.
PHK-200-T	11 Bar	2	3 / 4 kW-Hp	200 Lt.	514 Lt./min.	48x130x102 Cm	145 Kg.




300 LT. BELT - DRIVEN AIR COMPRESSORS



Pax Belt-Driven Air Compressors are single and double stage, high quality and high-performance compressors produced for industrial use.

It is driven by V belt - pulley. It can also be manufactured in different forms as single-phase and three-phase. The safety of the belt - pulley system is provided with a closed casing, and Italian ABAC pump head is used in order to supply efficient long lasting quality product life.

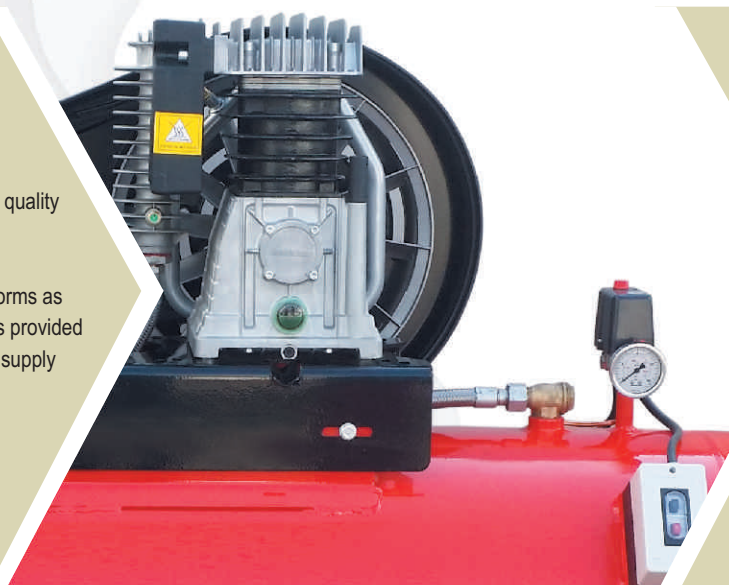


Technical Information:

Product Code	Pressure	Stage	Motor Power	Tank Volume	Air Suction	Dimensions	Weight
PHK-300	9 Bar	1	3 / 4 kW-Hp	300 Lt.	476 Lt./min.	54x182x110 Cm	170 Kg.
PHK-300 T	9 Bar	1	3 / 4 kW-Hp	300 Lt.	476 Lt./min.	54x182x110 Cm	170 Kg.
PHK-300-11-T	11 Bar	2	4 / 5,5 kW-Hp	300 Lt.	653 Lt./min.	54x182x110 Cm	208 Kg.




500 LT. BELT - DRIVEN AIR COMPRESSORS

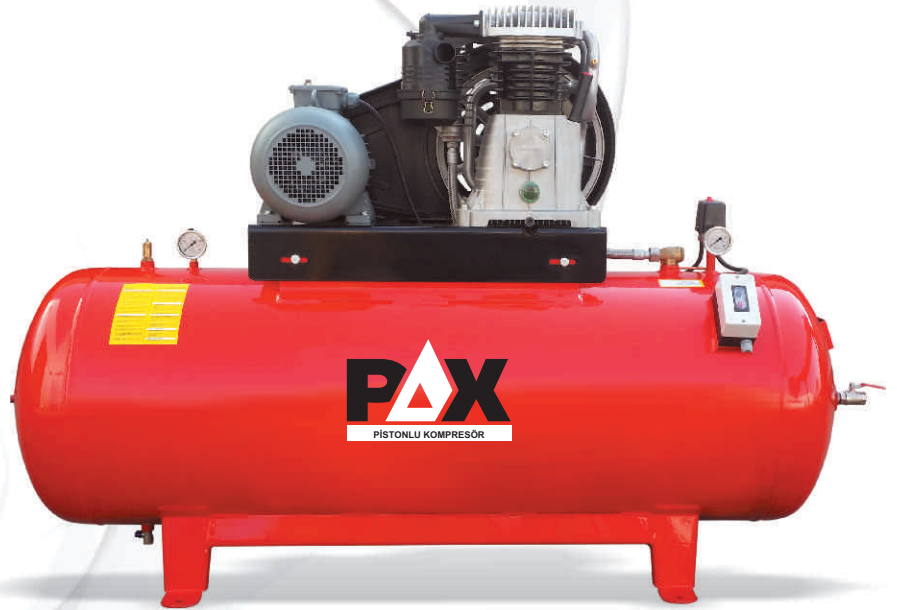

Pax Belt-Driven Air Compressors are double stage, high quality and high-performance compressors produced for industrial use.

It is driven by V belt - pulley. They are manufactured as three-phase air compressors. The safety of the belt - pulley system is provided with a closed casing, and Italian ABAC pump head is used in order to supply efficient long lasting quality product life.

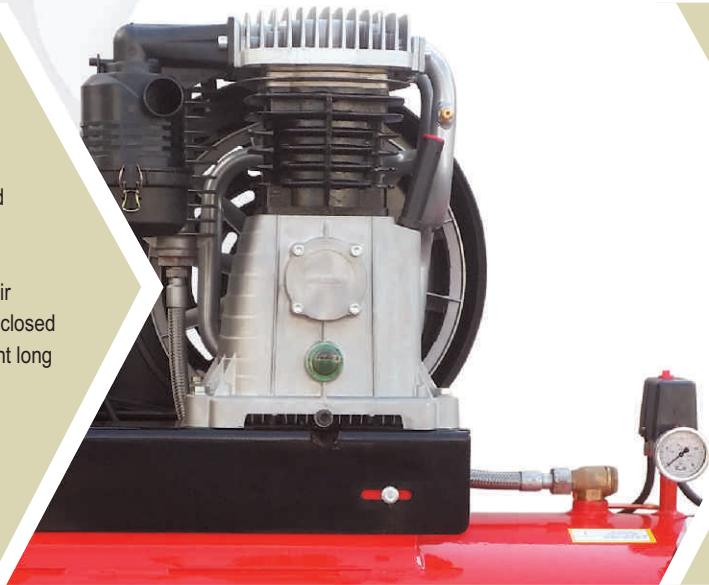

Technical Information:

Product Code	Pressure	Stage	Motor Power	Tank Volume	Air Suction	Dimensions	Weight
PHK-7.5-500-T	11 Bar	2	5,5 / 7,5 kW-Hp	500 Lt.	827 Lt./min.	60X203X127 Cm	277 Kg.
PHK-10-500-T	11 Bar	2	7,5 / 10 kW-Hp	500 Lt.	1210 Lt./min.	60X203X127 Cm	292 Kg.