




FABTEX ENGINEERING WORKS

www.fabtexbaler.com

TYRE BALER

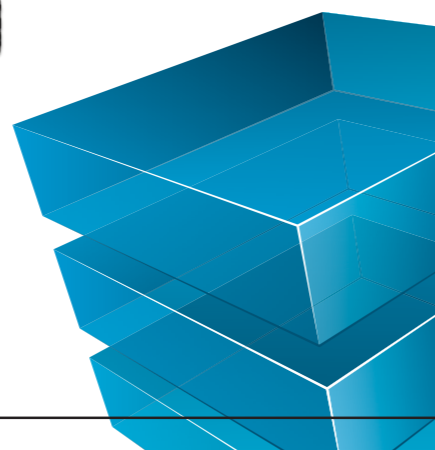

SPECIFICATION

í ŖŖŃ	FAB/TB/09	FAB/TB/14
Capacity (t)	90	140
Working Pressure (bar)	150	200
Baling Box Size (LxW)	1400mm x 700mm	1600mm x 900mm
Bale size (L x W x H)	1400mm x 700mm x 900mm	1600mm x 900mm x 1000mm
Motor Power (HP)	20	30
Oil Tank Capacity (Lit)	400	600
Number of Hoops	5	7
Production (Bales/hr)	2 – 3	2-3
Weight of the Machine (t)	3.5	5
Day Light (mm)	1900	2400

FEATURES

- *Sliding door* which increases work efficiency and saves labor.
- *Door Opening and closing* by hydraulic driven to ensure operational safety.
- *Fixed retainer dogs* for holding the pressed material from springing back.
- High compaction ratio
- *Effective Operation* Inspection window for safety and dust reduction.
- *Oil cooler* provided to maintain viscosity of oil.
- *Automatic bale ejector* means of chain, simplifies bale ejection.



www.fabtexbaler.com
info@fabtexasbaler.com



+91 422 2625465
+91 99944 59423



240/7, Irugur Rd,
Chinniyampalayam PO,
Coimbatore | 641 004